



## Connecteur droit filetage femelle FPR

### FPR plastic female thread connector

REVISION: **02**Fam.: **FPR-M/P (G/N)**Page **1**

DECRIIL SERIL ZI de la tuilliere 01700 MIRIBEL FRANCE · Tel: +33 (0)4 72 25 83 17·

#### DESCRIPTION

Connecteur droit en polyamide (PA6)  
Bonne résistance au choc et à la propagation de la flamme  
Pour la fixation de l'extrémité des gaines sur des plans plats  
En accord avec la norme EN 60204 (Sécurité des machines).  
Montage et démontage rapide type «Easy-click» sans outils  
Grande résistance à la traction  
APPLICATION FERROVIAIRE ET INDUSTRIELLE  
Couleur: gris foncé ou noir.

#### DESCRIPTION

Straight connector with incorporated female thread  
manufactured from high-quality polyamide (PA6).  
Free of halogens, phosphorus and cadmium.  
Shock resistant and not flame propagator.  
To be used in industry or railways.  
"Easy click" quick assembly and removal, high tensile strength  
and watertightness.  
Colours: dark grey and black

#### CARACTERISTIQUE DIMENSION / DIMENSIONAL CHARACTERISTICS


##### a) Connecteur FPR-M avec filetage femelle metrique / FPR-M connector with female thread for metric thread

Referencia / Reference		DN (*)	Pour filet / For thread	int.	A	C	D		LR	Poids / Weight g	Sachet / Packing u.
GRIS / GREY	NOIR / BLACK										
FPR-10M16G	FPR-10M16N	10	M16x1.5	10.5	42	21	23	18	13	8.5	50
FPR-12M20G	FPR-12M20N	12	M20x1,5	14.0	37	25	27	20	10	9.1	50
FPR-17M25G	FPR-17M25N	17	M25x1,5	19.5	47	31	33	27	15	17.7	50
FPR-23M32G	FPR-23M32N	23	M32x1.5	28.0	55	37	39	34	15	21.1	30
FPR-29M40G	FPR-29M40N	29	M40x1.5	27.0	57	46	49	42	17	44.2	10
FPR-36M50G	FPR-36M50N	36	M50x1.5	38.0	64	54	62	50	21	55.7	10
FPR-48M63G	FPR-48M63N	48	M63x1.5	49.0	67	69	72	66	19	81.8	5

##### b) Connecteur FPR-P avec filetage femelle PG / FPR-P connector with female thread for Pg thread

Reference / Reference		DN (*)	Pour filet / For thread	int.	A	C	D		LR	Poids / Weight g	Sachet / Packing u.
GRIS / GREY	NOIR / BLACK										
FPR-10P09G	FPR-10P09N	10	Pg 9	10.4	37	21	21	18	10	7.0	50
FPR-12P11G	FPR-12P11N	12	Pg 11	13.7	38	26	26	20	10	9.3	50
FPR-17P16G	FPR-17P16N	17	Pg 16	16.3	42	29	29	27	11	13.2	50
FPR-23P21G	FPR-23P21N	23	Pg 21	21.0	52	35	35	34	14	20.3	30
FPR-29P29G	FPR-29P29N	29	Pg 29	25.3	54	46	46	42	12	33.4	10
FPR-36P36G	FPR-36P36N	36	Pg 36	37.6	57	56	56	50	15	43.6	10
FPR-48P48G	FPR-48P48N	48	Pg 48	48.0	63	72	72	66	16	56.9	5

(\*) DN = Diametre nominal de la gaine / Nominal Diameter of the conduit  
Dimensions en mm / Dimensions in mm

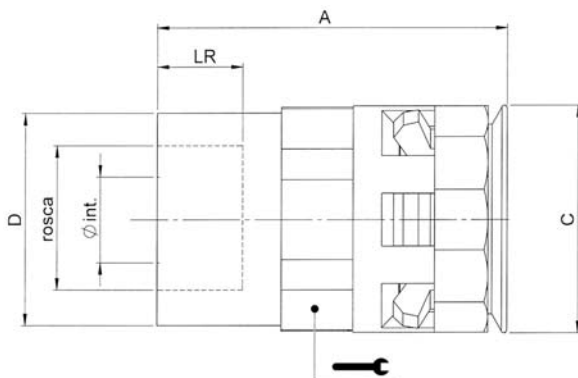

#### Certificaciones / Certifications

	London Underground
	CE
	RoHS compliant